



# Acoustek

## Acoustek Australia

E: [sales@acoustek.com.au](mailto:sales@acoustek.com.au)

Ph: +61(0) 418 792 788

Web: [www.acoustek.com.au](http://www.acoustek.com.au)

## Acoustek New Zealand

E: [sales@acoustek.co.nz](mailto:sales@acoustek.co.nz)

Ph: +64 (0)22 430 2214

Web: [www.acoustek.co.nz](http://www.acoustek.co.nz)

# Clover Acoustic Panel

---

Introducing the Clover Acoustic Wall Panel, perfect for creating a unique and individual look. Utilising our 4 leaf clover in your preferred design layout offers a sound benefit of up to 90% reverberate noise absorption, making it both stylish and practical.

# Unique features

This 3 dimensional panel was designed by our in house design team to maximise reverberate noise absorption and offer an individual design that would enhance any decor.

Choose from 26 different colours to create your own Clover Patch, whether a subtle hint of verdant greens or a vibrant and exciting statement, the colour choice is variable.



4 Clovers per pack, per colour, allowing mix and match for a custom layout, considered a good luck charm this Clover brings more than individual style to your office, boardroom or home. Make a ‘Sound Statement’ while keeping your space quiet with the Clover Acoustic Wall Panel.

Each Clover is 400mm square with ‘leaf protrusion’ of 90mm from wall.

# Performance example

NRC 0.90 puts a product immediately into the class A category of absorption.

Frequency (Hz)	SAC	Oct
100	0.17	0.23
125	0.20	
160	0.31	
200	0.51	0.65
250	0.70	
315	0.75	
400	0.80	0.84
500	0.83	
630	0.88	
800	0.89	1.06
1000	1.10	
1250	1.18	
1600	1.27	1.34
2000	1.35	
2500	1.41	
3150	1.45	1.43
4000	1.44	
5000	1.40	
NRC		NRC 0.95
Alpha		0.90
SAC		A

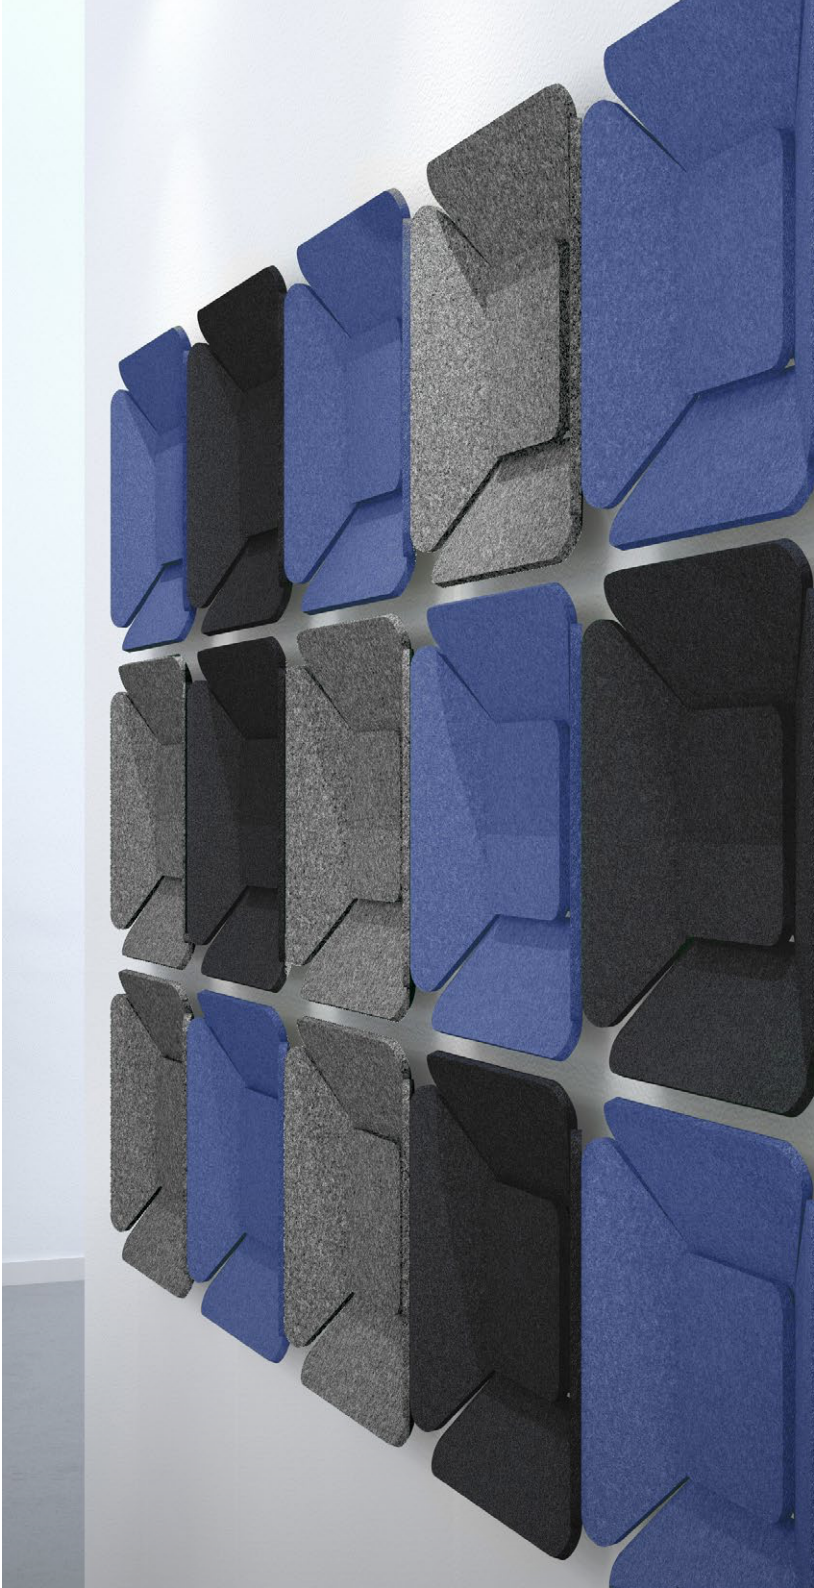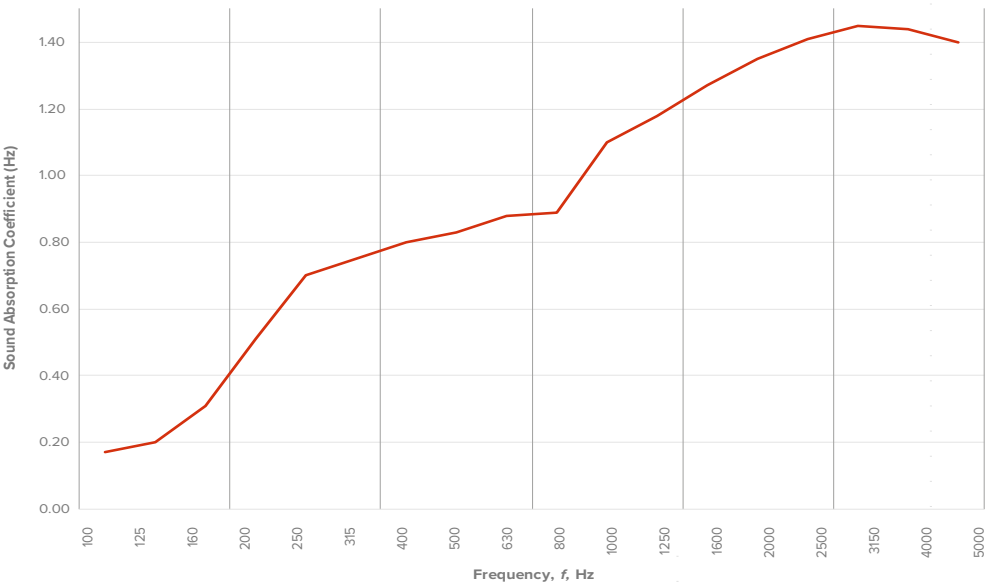





Sustainable Design

Acoustek 3D Lights, Beams, Blades, Tiles and Acoustic Screens are certified GreenTagCert™ GreenRate Level A.




AS standards and BS standards:  
AS 1530.3, AS 3837, BS 476

Suitable for use in Green Star™ projects. GreenTagCert™ is a certification and rating tool for building professionals approved by the Green Building Council of Australia (GBCAPhysical).

Melting point:	250°C
Vapour pressure:	Not applicable
Volatiles:	Nil
Flash point:	None allocated
Other properties:	Non-allergenic, low irritant, low flame response, resilient
Ingredients:	Organic, long chain synthetic polymers
Max service temp:	110°C
Alkalinity:	pH 7.8 (pH 7 is neutral)
Moisture absorption:	Exposure to an atmosphere of 50oC and 95% RH for four days gives moisture absorption of less than 0.2% by volume
Fire Hazard Properties:	<p>The following results were obtained when subjected to early fire hazard testing in accordance with Australian Standards AS 1530.3</p> <p>Ignitability: 7   Spread of Flame: 0 Smoke Developed: 5   Heat Evolved: 2</p>

## Clover Acoustic Panel - Decorative Finishes


Acoustek



AMAZONITE



AUBERGINE



RUBY



APPLE



AGATE



LAPIS




MARINE




SNOW



FLANNEL




SCHIST



CHARCOAL



PUMICE



SLATE



WHETSTONE



EBONY



GRANITE



PEBBLE



BISCUIT




DULSE



MULBERRY



MOSS



LIME



ROSE



BLUSH



LEMON



ORANGE