



Pyramid Enclave Acoustic Shades

Pyramid Enclave offers 4 individual shades within an offset design that will maximise aesthetics and surface area of the acoustic membrane, making this shade ideal for glass panelled boardrooms, meeting spaces, restaurants and most reverberant noise plagued areas.

Designed as a suspended Enclave of 4 individual but complex shapes the absorptive surface area is increased to firmly place this beautiful shade into Category A absorption territory. Refer our Performance Example to help qualify a solution to your acoustic needs.

All Acoustek lighting is available either hard or soft wired and complies with international standards.

1

Performance example

A typical boardroom measuring 4.2m x 4.8m x 2.7m with carpet flooring and plasterboard/ ceiling & wall surfaces plus Glazing.


- Occupied room reverberation time will be 1.1 seconds
- Target reverberation 0.6 to 0.8 seconds (as per AS2107:2016)

An addition of 3-7 Sabines at each middle frequencies (500Hz-1000Hz) will result in a **new reverberation time within the target range of 0.6-0.8.** Achieved with 2 x Pyramid Enclave Shades.

Pyramid Enclave looks perfect as a single tone or contrasting colour shade. If however you prefer even further individuality it is possible to contrast or blend colours choosing a different colour per shade, a small surcharge will apply but a bespoke design achieved.


Dimensions: H 350 x W 900mm

Frequency/Hz	Reference curve	Practical sound absorption coefficient,	Weighted sound absorption coefficient,	Sound absorption classes
125	-	0.35		
250	0.65	0.70		
500	0.85	0.90	0.85	В
1000	0.85	0.75	0.85	В
2000	0.85	0.85		
4000	0.75	0.95		

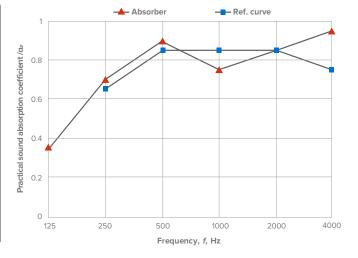





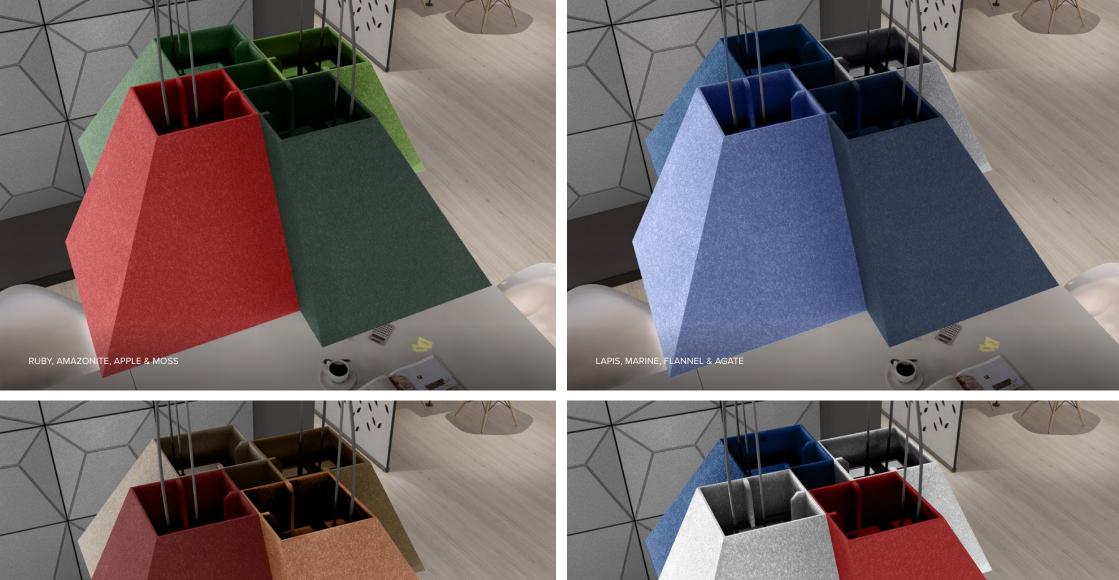





Pyramid Enclave Shade - Decorative Finishes

Acoustek



Pyramid Enclave Shade - Decorative Finishes



